CERTPARK

QUESTION & ANSWER

CERTPARK.COM

Accurate Study Guides,
High Passing Rate!
provides update
free of charge
in one year!

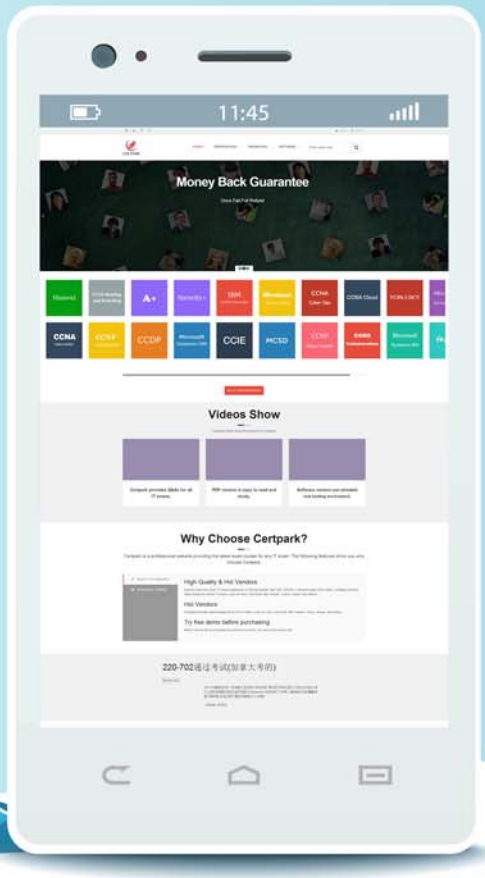

https://www.certpark.com

Exam : **DES-DD23**

Title : Specialist : Implementation Engineer - PowerProtect DD Exam

Version : DEMO

1.When using CIFS from a PowerProtect DD system, what should be changed on a Windows machine?
A. SMBTimeout to 7200 seconds
B. CIFSTimeout to 3600 seconds
C. SESSTIMEOUT to 7200 seconds
D. SESSTIMEOUT to 3600 seconds
Answer: D

2.Which component of PowerProtect DD is Data Invulnerability Architecture a feature of?
A. VTL
B. DDOS
C. DD Boost
D. CIFS
Answer: B
Explanation:
Reference:
https://www.dell.com/community/Data-Domain/Introducing-data-protection-technology-DIA-of-Data-Domain/td-p/6960086

3.A backup administrator is tasked with verifying the compression savings of a PowerProtect DD9900. Which compression algorithm will they see enabled by default?
A. lzw
B. gzfast
C. lz
D. gz
Answer: B
Explanation:
Reference:
https://www.delltechnologies.com/asset/en-ee/products/data-protection/industry-market/dell-emc-powerprotect-dd-series-appliances-hardware-assisted-compression.pdf

4.Refer to the exhibit.

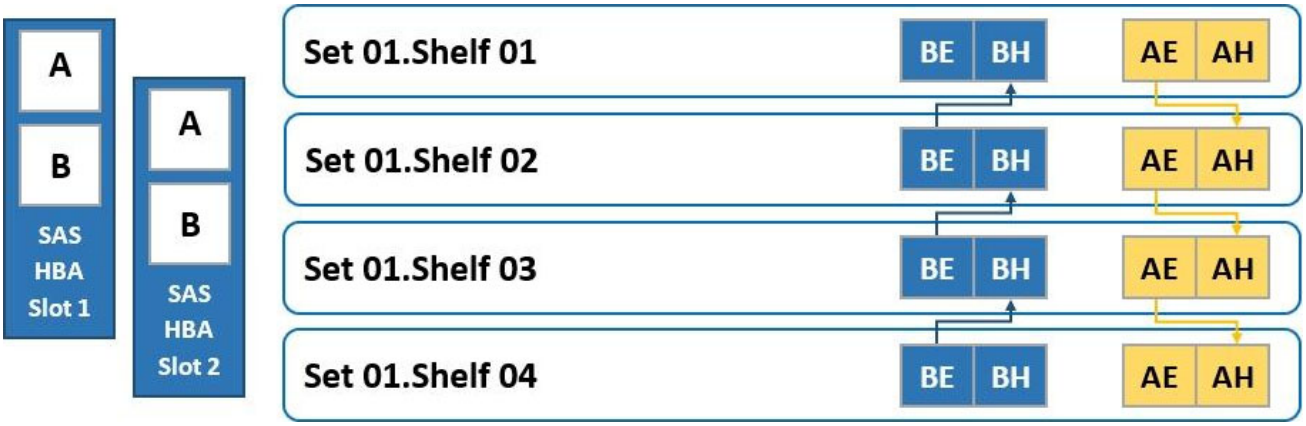

To which shelf and port should SAS HBA slot 1 port B be connected?
A. Shelf 04 BH

B. Shelf 01 BH
C. Shelf 04 BE
D. Shelf 01 BE
Answer: A

5.An administrator recognizes poor network performance when using CIFS shares from a PowerProtect DD system. The network link utilization is under 100%.
What is the most likely cause of this issue?
A. TCP window size too small
B. TCP timeout too small
C. TCP timeout too large
D. TCP window size too large
Answer: A