



**Exam** : **NSE6\_FML-6.2**

**Title** : Fortinet NSE 6 - FortiMail  
6.2

**Version** : DEMO

1.Refer to the exhibit.

Mail Server Settings	Relay Host List	Disclaimer	Disclaimer Exclusion List	Storage
<b>Local Host:</b>				
Host name:	<input type="text" value="mx"/>			
Local domain name:	<input type="text" value="example.com"/>			
SMTP server port number:	<input type="text" value="25"/>			
SMTP over SSL/TLS	<input checked="" type="checkbox"/>			
SMTPS server port number:	<input type="text" value="465"/>			
SMTP MSA service	<input type="checkbox"/>			
SMTP MSA port number:	<input type="text" value="587"/>			
POP3 server port number:	<input type="text" value="110"/>			
Default domain for authentication:	<input type="text" value="--None--"/>			
Redirect HTTP to HTTPS	<input checked="" type="checkbox"/>			

Which two statements about the mail server settings are true? (Choose two.)

- A. FortiMail will support the STARTTLS extension
- B. FortiMail will accept SMTPS connections
- C. FortiMail will drop any inbound plaintext SMTP connection
- D. FortiMail will enforce SMTPS on all outbound sessions

**Answer:** B,C

2.A FortiMail is configured with the protected domain example.com.

On this FortiMail, which two envelope addresses are considered incoming? (Choose two.)

- A. MAIL FROM: accounts@example.com RCPT TO: sales@external.org
- B. MAIL FROM: support@example.com RCPT TO: marketing@example.com
- C. MAIL FROM: training@external.org RCPT TO: students@external.org
- D. MAIL FROM: mis@hosted.net RCPT TO: noc@example.com

**Answer:** C,D

**Explanation:**

Reference: [https://fortinetweb.s3.amazonaws.com/docs.fortinet.com/v2/attachments/9aa62d26-858d-11ea-9384-00505692583a/FortiMail-6.4.0-Administration\\_Guide.pdf](https://fortinetweb.s3.amazonaws.com/docs.fortinet.com/v2/attachments/9aa62d26-858d-11ea-9384-00505692583a/FortiMail-6.4.0-Administration_Guide.pdf) (30)

3.Which FortiMail option removes embedded code components in Microsoft Word, while maintaining the original file format?


- A. Behavior analysis
- B. Impersonation analysis
- C. Content disarm and reconstruction
- D. Header analysis

**Answer: C**

**Explanation:**

Reference: <https://fortinetweb.s3.amazonaws.com/docs.fortinet.com/v2/attachments/8c063dd3-bafe-11e9-a989-00505692583a/fortimail-admin-620.pdf> (435)

4.Refer to the exhibit.

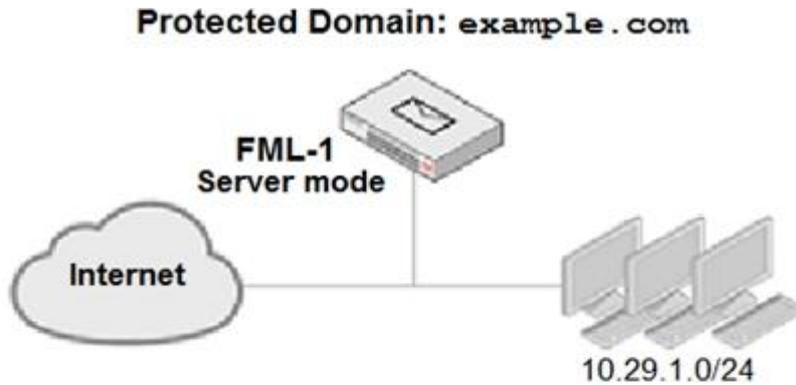

**Access Control Rule**

Enabled:

Sender: User Defined (dropdown)  
\*

Recipient: User Defined (dropdown)  
\*

Source: IP/Netmask (dropdown)  
0.0.0.0/0

Reverse DNS pattern: \*  Regular Expression

Authentication status: Any (dropdown)

TLS profile: --None-- (dropdown) + New Edit

Action: Relay (dropdown)

Comments:

An administrator must enforce authentication on FML-1 for all outbound email from the example.com domain.

Which two settings should be used to configure the access receive rule? (Choose two.)

- A. The Recipient pattern should be set to \*@example.com
- B. The Authentication status should be set to Authenticated
- C. The Sender IP/netmask should be set to 10.29.1.0/24
- D. The Action should be set to Reject

**Answer: B,C**

5.Refer to the exhibit.

```
C:\>nslookup -type=mx example.com
Server:  PriNS
Address: 10.200.3.254

Non-authoritative answer:
example.com      MX preference = 10, mail exchanger = mx.hosted.com
example.com      MX preference = 20, mail exchanger = mx.example.com
```

Which two statements about the MTAs of the domain example.com are true? (Choose two.)

- A. The external MTAs will send email to mx.example.com only if mx.hosted.com is unreachable
- B. The PriNS server should receive all email for the example.com domain
- C. The primary MTA for the example.com domain is mx.hosted.com
- D. The higher preference value is used to load balance more email to the mx.example.com MTA

**Answer:** A,C