

# CERTPARK



## QUESTION & ANSWER



CERTPARK.COM

Accurate Study Guides,  
High Passing Rate!  
provides update  
free of charge  
in one year!



**Exam** : **NSE6\_FML-6.2**

**Title** : Fortinet NSE 6 - FortiMail  
6.2

**Version** : DEMO

1.Refer to the exhibit.

Which two statements about the access receive rule are true? (Choose two.)

- A. Email matching this rule will be relayed
- B. Email must originate from an example.com email address to match this rule
- C. Senders must be authenticated to match this rule
- D. Email from any host in the 10.0.1.0/24 subnet can match this rule

**Answer:** A,B

2.Which firmware upgrade method for an active-passive HA cluster ensures service outage is minimal, and there are no unnecessary failovers?

- A. Break the cluster, upgrade the units independently, and then form the cluster
- B. Upgrade both units at the same time
- C. Upgrade the standby unit, and then upgrade the active unit
- D. Upgrade the active unit, which will upgrade the standby unit automatically

**Answer:** B

**Explanation:**

Reference:

<https://docs.fortinet.com/document/fortimail/6.2.0/administration-guide/725928/upgrading-firmware-on-ha-units>

3.Refer to the exhibit.

```
C:\>nslookup -type=mx example.com
Server:  PriNS
Address: 10.200.3.254


Non-authoritative answer:
example.com      MX preference = 10, mail exchanger = mx.hosted.com
example.com      MX preference = 20, mail exchanger = mx.example.com
```

Which two statements about the MTAs of the domain example.com are true? (Choose two.)

- A. The external MTAs will send email to mx.example.com only if mx.hosted.com is unreachable
- B. The PriNS server should receive all email for the example.com domain
- C. The primary MTA for the example.com domain is mx.hosted.com
- D. The higher preference value is used to load balance more email to the mx.example.com MTA

**Answer:** A,C

4.Refer to the exhibit.

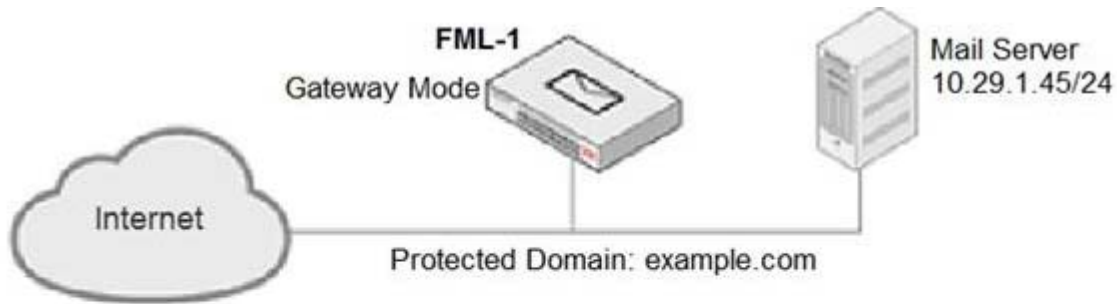

Access Control Rule



Enabled	<input checked="" type="checkbox"/>
Sender:	User Defined *
Recipient:	User Defined *
Source:	IP/Netmask 0.0.0.0/0
Reverse DNS pattern:	* <input type="checkbox"/> Regular Expression
Authentication status:	Any
TLS profile:	--None-- <input type="button" value="+ New..."/> <input type="button" value="Edit..."/>
Action:	Reject
Comments:	

It is recommended that you configure which three access receive settings to allow outbound email from the example.com domain on FML-1? (Choose three.)

- A. The Sender pattern should be set to \*@example.com
- B. The Action should be set to Relay
- C. The Recipient pattern should be set to 10.29.1.45/24
- D. The Enable check box should be cleared
- E. The Sender IP/netmask should be set to 10.29.1.45/32

**Answer:** B,D,E

5.Refer to the exhibit.

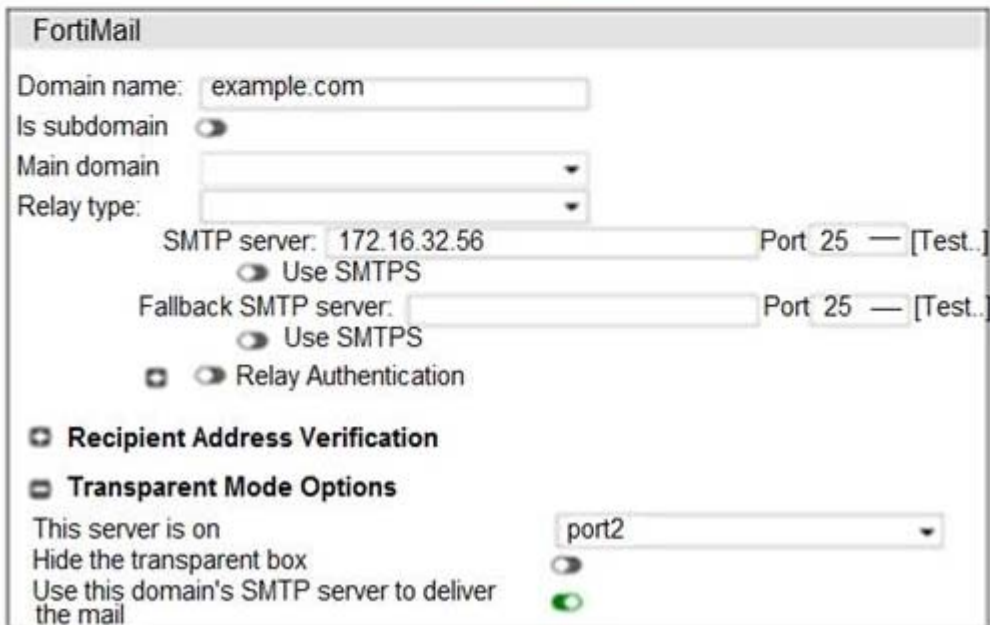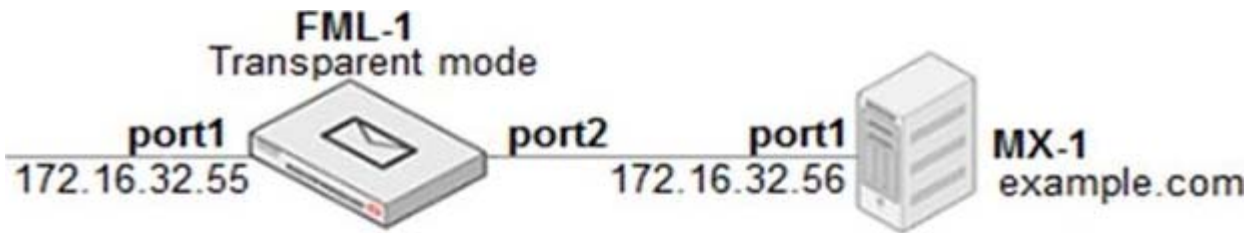

Which two statements about how the transparent mode FortiMail device routes email for the example.com domain are true? (Choose two.)

- A. If incoming email messages are undeliverable, FML-1 can queue them to retry later
- B. If outgoing email messages are undeliverable, FM-1 can queue them to retry later
- C. FML-1 will use the built-in MTA for outgoing sessions
- D. FML-1 will use the transparent proxy for incoming sessions

**Answer:** B,D